


# Reverse Proxy

To do reserve proxy for window server we need to do the following steps.

Create a website, in our case it is STAGE, with in the stage we created Application called Jaya-stage.

Please note that this application name is very important we need to create reverse proxy with the same name in Nginx server in ubuntu.

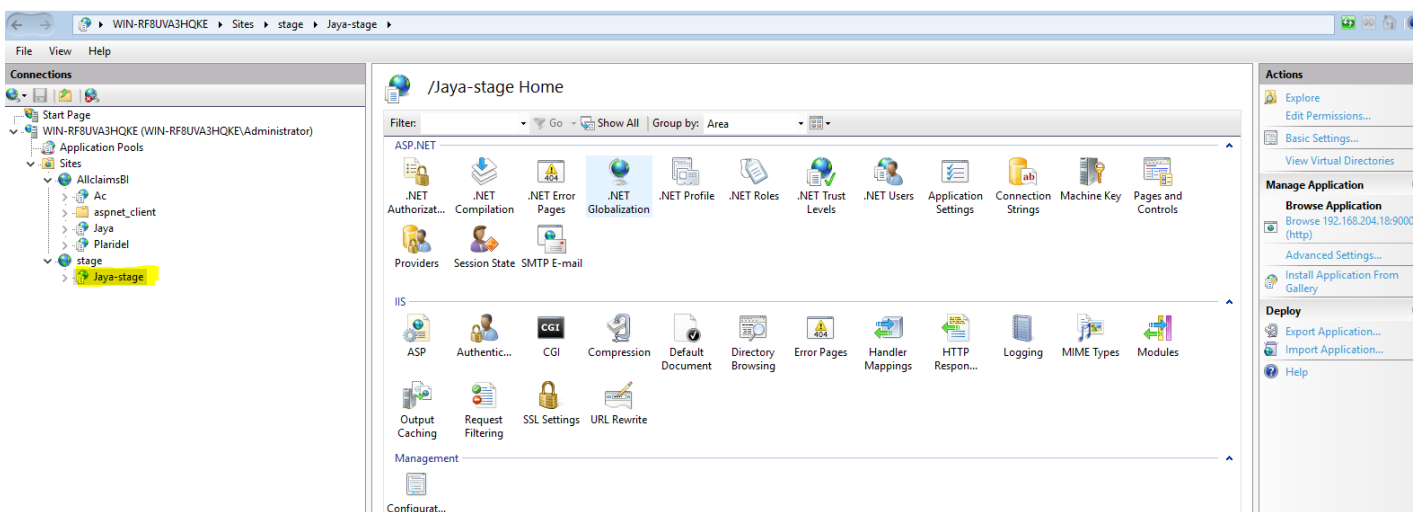

Next step to create a reverse proxy configuration on Nginx server as shown below.

```
GNU nano 2.9.3 /etc/nginx/sites-available/default

#
location /book/ {
    proxy_pass "http://192.168.204.19:8080/";
    add_header Strict-Transport-Security "max-age=31536000; includeSubDomains" always;
    add_header X-Frame-Options SAMEORIGIN;
    add_header X-Content-Type-Options nosniff;
    add_header X-XSS-Protection "1; mode=block";
    client_max_body_size 2m;
    client_body_timeout 120s; # Default is 60, May need to be increased for very large uploads
}

## ALLCLAIMS STAGE
location /jaya-stage/ {
    proxy_pass "http://192.168.204.18:9000/jaya-stage/";
    add_header Strict-Transport-Security "max-age=31536000; includeSubDomains" always;
    add_header X-Frame-Options SAMEORIGIN;
    add_header X-Content-Type-Options nosniff;
    add_header X-XSS-Protection "1; mode=block";
    client_max_body_size 2m;
    client_body_timeout 120s; # Default is 60, May need to be increased for very large uploads
}

## OPEN PROJECT - START
location /project/ {
    proxy_pass "http://192.168.1.203/openproject/";
    add_header Strict-Transport-Security "max-age=31536000; includeSubDomains" always;
    add_header X-Frame-Options SAMEORIGIN;
    add_header X-Content-Type-Options nosniff;
    add_header X-XSS-Protection "1; mode=block";
}

^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos M-U Undo
^X Exit ^R Read File ^\ Replace ^U Uncut Text ^T To Spell ^_ Go To Line M-E Redo
```

```
## ALLCLAIMS STAGelocation /jaya-stage/ {
[proxy_pass "http://192.168.204.18:9000/jaya-stage/";
    add_header Strict-Transport-Security "max-age=31536000; includeSubDomains" always;
    add_header X-Frame-Options SAMEORIGIN;
    add_header X-Content-Type-Options nosniff;
    add_header X-XSS-Protection "1; mode=block";c
    client_max_body_size 2m;client_body_timeout 120s; # Default is 60, May need to be
increased for very large uploads
}
```

<https://docker2.auto-boxe.com/jaya-stage/>

Revision #1

Created Mon, Apr 26, 2021 7:39 AM by [Krishnaa](#)

Updated Mon, Apr 26, 2021 7:46 AM by [Krishnaa](#)